


768 LG
MALE CONNECTOR

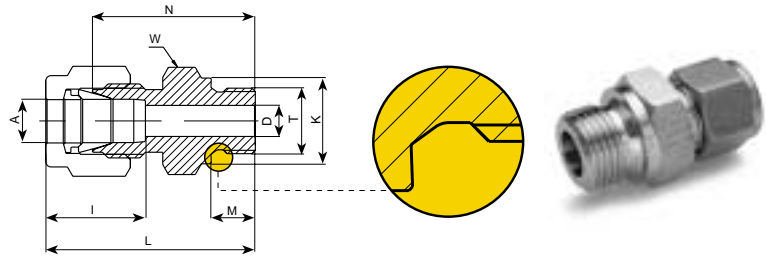

TUBE (METRIC) ISO PARALLEL THREAD


Ordering Information	A	T	D	K	W	N	M	L	I
	Tube O.D.	(P-ISO)			Hex. Flat				
	mm	in	mm	mm	mm	mm	mm	mm	mm
768LG _ 2 X 1/8	2	G-1/8	1.7	13.8	14	23.4	7.1	30.0	12.9
768LG _ 3 X 1/8	3	G-1/8	2.4	13.8	14	23.4	7.1	30.0	12.9
768LG _ 3 X 1/4	3	G-1/4	2.4	18.0	19	28.7	11.2	35.3	12.9
768LG _ 4 X 1/8	4	G-1/8	2.4	13.8	14	24.1	7.1	30.7	13.7
768LG _ 6 X 1/8	6	G-1/8	4.0	13.8	14	24.9	7.1	24.9	15.3
768LG _ 6 X 1/4	6	G-1/4	4.8	18.0	19	30.2	11.2	37.6	15.3
768LG _ 6 X 3/8	6	G-3/8	4.8	21.8	22	31.5	11.2	38.9	15.3
768LG _ 6 X 1/2	6	G-1/2	4.8	26.0	27	37.3	14.2	44.7	15.3
768LG _ 8 X 1/8	8	G-1/8	4.0	13.8	15	25.7	7.1	33.2	16.2
768LG _ 8 X 1/4	8	G-1/4	6.4	13.8	19	31.0	11.2	38.5	16.2
768LG _ 8 X 3/8	8	G-3/8	6.4	21.8	22	32.3	11.2	39.8	16.2
768LG _ 8 X 1/2	8	G-1/2	6.4	26.0	27	38.1	14.2	45.6	16.2
768LG _ 10 X 1/4	10	G-1/4	5.9	18.0	19	31.8	11.2	39.4	17.2
768LG _ 10 X 3/8	10	G-3/8	7.9	21.8	22	33.0	11.2	40.6	17.2
768LG _ 10 X 1/2	10	G-1/2	7.9	26.0	27	38.9	14.2	46.5	17.2
768LG _ 12 X 1/4	12	G-1/4	5.9	18.0	22	32.5	11.2	42.6	22.8
768LG _ 12 X 3/8	12	G-3/8	7.9	21.8	22	33.0	11.2	43.1	22.8
768LG _ 12 X 1/2	12	G-1/2	9.5	26.0	27	38.9	14.2	49.0	22.8
768LG _ 12 X 3/4	12	G-3/4	9.5	32.0	35	42.7	15.7	52.8	22.8
768LG _ 16 X 3/8	16	G-3/8	7.9	21.8	24	33.8	11.2	43.9	24.4
768LG _ 16 X 1/2	16	G-1/2	11.9	26.0	27	38.9	14.2	49.0	24.4
768LG _ 18 X 1/2	18	G-1/2	11.9	26.0	27	38.9	14.2	49.0	24.4
768LG _ 18 X 3/4	18	G-3/4	15.1	32.0	35	42.7	15.7	52.8	24.4
768LG _ 20 X 1/2	20	G-1/2	11.9	26.0	30	40.4	14.2	50.5	26.0
768LG _ 20 X 3/4	20	G-3/4	15.9	32.0	35	42.7	15.7	52.8	26.0
768LG _ 22 X 3/4	22	G-3/4	15.9	32.0	35	42.7	15.7	52.8	26.0
768LG _ 22 X 1	22	G-1	18.3	39.0	41	45.2	18.3	55.3	26.0
768LG _ 25 X 3/4	25	G-3/4	15.9	32.0	35	45.2	15.7	57.5	31.3
768LG _ 25 X 1	25	G-1	19.8	39.0	41	47.8	18.3	60.1	31.3

Reference Specifications:

DIN - ISO 228/1
BS - 2779
JIS - B0202
ISO - 228/1-BSP-P

- 55° Thread angle
- Pitch measured in inches
- Truncation of root and crest are round
- Diameter measured in inches

Designation:
Marking LG on Hex.

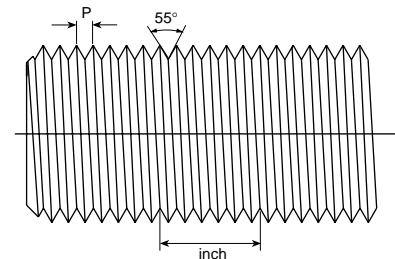


• "D" - Dimension is minimum opening. • Dimensions are for reference only, and are subject to change without notice.

For inches, see next page

LET-LOK TUBE FITTINGS

768 LG MALE CONNECTOR (Cont'd)

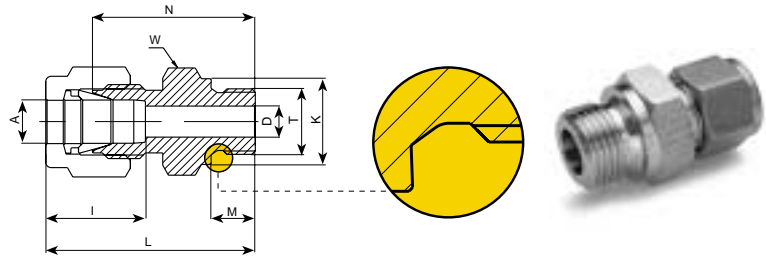

TUBE (INCH) ISO PARALLEL THREAD

Ordering Information	A		T		D		K		W		N		M		L		I	
	Tube O.D.		(P-ISO)						Hex. Flat									
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
768LG _ 1/8 X 1/8	1/8	3.17	1/8	3.17	0.09	2.30	0.54	13.80	9/16	14.3	0.92	23.40	0.28	7.10	1.18	30.00	0.50	12.70
768LG _ 1/8 X 1/4	1/8	3.17	1/4	6.35	0.09	2.30	0.71	18.00	3/4	19.1	1.13	28.70	0.44	11.20	1.39	35.30	0.50	12.70
768LG _ 1/8 X 3/8	1/8	3.17	3/8	9.52	0.09	2.30	0.86	21.80	7/8	22.2	1.17	29.72	0.44	11.20	1.46	37.00	0.50	12.70
768LG _ 1/8 X 1/2	1/8	3.17	1/2	12.70	0.09	2.30	1.02	26.00	1 1/16	27.0	1.40	35.70	0.56	14.20	1.69	43.00	0.50	12.70
768LG _ 3/16 X 1/8	3/16	4.76	1/8	3.17	0.12	3.10	0.54	13.80	9/16	14.3	0.95	24.10	0.28	7.10	1.20	30.70	0.54	13.75
768LG _ 1/4 X 1/8	1/4	6.35	1/8	3.17	0.16	4.10	0.54	13.80	9/16	14.3	0.98	24.90	0.28	7.10	1.27	32.26	0.60	15.24
768LG _ 1/4 X 1/4	1/4	6.35	1/4	6.35	0.19	4.80	0.71	18.00	3/4	19.1	1.19	30.20	0.44	11.20	1.48	37.60	0.60	15.24
768LG _ 1/4 X 3/8	1/4	6.35	3/8	9.52	0.19	4.80	0.86	21.80	7/8	22.2	1.24	31.50	0.44	11.20	1.53	38.86	0.60	15.24
768LG _ 1/4 X 1/2	1/4	6.35	1/2	12.70	0.19	4.80	1.02	26.00	1 1/16	27.0	1.47	37.30	0.56	14.20	1.76	44.70	0.60	15.24
768LG _ 5/16 X 1/4	5/16	7.93	1/4	6.35	0.25	6.40	0.71	18.00	3/4	19.1	1.22	31.00	0.44	11.20	1.51	38.36	0.63	16.11
768LG _ 5/16 X 3/8	5/16	7.93	3/8	9.52	0.25	6.40	0.86	21.80	7/8	22.2	1.27	32.30	0.44	11.20	1.56	39.66	0.63	16.11
768LG _ 3/8 X 1/4	3/8	9.52	1/4	6.35	0.23	5.80	0.71	18.00	3/4	19.1	1.25	31.75	0.44	11.20	1.54	39.11	0.66	16.76
768LG _ 3/8 X 3/8	3/8	9.52	3/8	9.52	0.28	7.10	0.86	21.80	7/8	22.2	1.30	33.00	0.44	11.20	1.59	40.40	0.66	16.76
768LG _ 3/8 X 1/2	3/8	9.52	1/2	12.70	0.28	7.10	1.02	26.00	1 1/16	27.0	1.53	38.86	0.56	14.20	1.82	46.22	0.66	16.76
768LG _ 1/2 X 1/4	1/2	12.70	1/4	6.35	0.23	5.80	0.71	18.00	13/16	20.6	1.28	32.50	0.44	11.20	1.68	42.67	0.90	22.86
768LG _ 1/2 X 3/8	1/2	12.70	3/8	9.52	0.31	7.90	0.86	21.80	7/8	22.2	1.30	33.00	0.44	11.20	1.70	43.18	0.90	22.86
768LG _ 1/2 X 1/2	1/2	12.70	1/2	12.70	0.41	10.40	1.02	26.00	1 1/16	27.0	1.47	37.40	0.56	14.20	1.93	49.00	0.90	22.86
768LG _ 1/2 X 3/4	1/2	12.70	3/4	19.05	0.41	10.40	1.26	32.00	1 5/16	33.3	1.68	42.70	0.62	15.70	2.08	52.86	0.90	22.86
768LG _ 5/8 X 3/8	5/8	15.87	3/8	9.52	0.31	7.90	0.86	21.80		24.0	1.33	33.80	0.44	11.20	1.73	43.96	0.96	24.38
768LG _ 5/8 X 1/2	5/8	15.87	1/2	12.70	0.47	11.90	1.02	26.00	1 1/16	27.0	1.53	38.90	0.56	14.20	1.93	49.10	0.96	24.38
768LG _ 3/4 X 1/2	3/4	19.05	1/2	12.70	0.47	11.90	1.02	26.00	1 1/16	27.0	1.53	38.86	0.56	14.20	1.93	49.00	0.96	24.38
768LG _ 3/4 X 3/4	3/4	19.05	3/4	19.05	0.62	15.80	1.26	32.00	1 5/16	33.3	1.68	42.70	0.62	15.70	2.08	52.83	0.96	24.38
768LG _ 1 X 1/2	1	25.40	1/2	12.70	0.47	11.90	1.02	26.00	1 3/8	34.9	1.72	43.70	0.56	14.20	2.20	55.80	1.23	31.24
768LG _ 1 X 3/4	1	25.40	3/4	19.05	0.62	15.90	1.26	32.00	1 3/8	34.9	1.78	45.20	0.62	15.70	2.65	67.30	1.23	31.24
768LG _ 1 X 1	1	25.40	1	25.40	0.78	19.80	1.54	39.00	1 5/8	41.3	1.88	47.80	0.72	18.30	2.36	59.94	1.23	31.24

● "D" - Dimension is minimum opening. ● Dimensions are for reference only, and are subject to change without notice.