



**769 LG
MALE ELBOW**

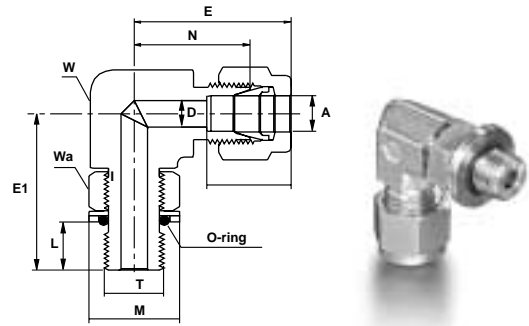

TUBE (INCH) TO ISO PARALLEL THREAD (POSITIONABLE)*																							
Ordering Information	A		T	D		W		Wa		N		E		E1		L		M		I	O-ring** I.D.	Washer	
	Tube O.D.		(ISO)	Wrench Flat		Hex. Flat																	
	in	mm	in	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	DASH No.	mm
769LG SS 1/4 X 1/8 POS.	1/4	6.35	1/8-28 BSPP	0.16	4.0	1/2	12.7	9/16	14.3	0.77	19.6	1.06	26.9	1.04	26.4	0.32	8.1	0.68	17.3	0.60	15.3	8.0	17.3x1.1

TUBE (METRIC) TO ISO PARALLEL THREAD (POSITIONABLE)*																						
Ordering Information	A		T	D		W		Wa		N		E		E1		L		M		I	O-ring** I.D.	Washer
	Tube O.D.		(ISO)	Wrench Flat		Hex. Flat																
	mm	in	mm	in	mm	mm	in	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	DASH No.	mm
769LG SS 6 X 1/8 POS.	6	1/8-28 BSPP	4.0	1/2	12.7	9/16	14.3	19.6	26.9	26.4	8.1	17.3	15.3	8.0	17.3x1.1							

**769 LG 45°
MALE ELBOW 45°**

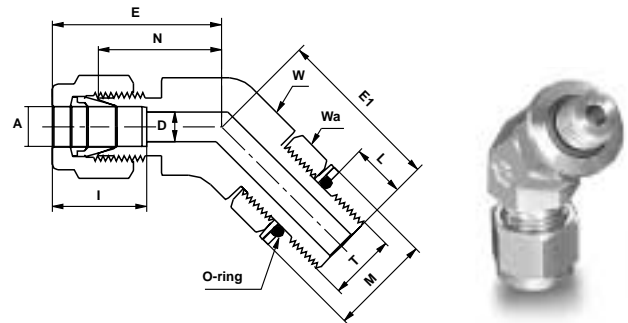

TUBE (INCH) TO ISO PARALLEL THREAD (POSITIONABLE)*																							
Description	A		T	D		W		Wa		N		E		E1		L		M		I	O-ring** I.D.	Washer	
	Tube O.D.		(ISO)	Wrench Flat		Hex. Flat																	
	in	mm	in	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	DASH No.	mm
769LAG SS 1/4 X 1/8 POS.	1/4	6.35	1/8-28 BSPP	0.16	4.0	9/16	14.3	9/16	14.3	0.69	17.5	0.98	24.9	0.94	24.0	0.32	8.1	0.68	17.3	0.60	15.3	8.0	17.3x1.1

TUBE (METRIC) TO ISO PARALLEL THREAD (POSITIONABLE)*																						
Ordering Information	A		T	D		W		Wa		N		E		E1		L		M		I	O-ring** I.D.	Washer
	Tube O.D.		(ISO)	Wrench Flat		Hex. Flat																
	mm	in	mm	in	mm	mm	in	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	DASH No.	mm
769LAG SS 6 X 1/8 POS.	6	1/8-28 BSPP	4.0	9/16	14.3	9/16	14.3	17.5	24.9	24.0	8.1	17.3	15.3	8.0	17.3x1.1							

* "D" - Dimension is minimum opening. • Dimensions are for reference only, and are subject to change without notice.

* Per B.S. 2779 ** O-rings used are Viton 90 Durometer. Other O-ring materials are available on request. For more technical information, see page 68.