



SPEC MASTER HPM6200 SERIES

6.0 Purity Single Stage Nickel Plated Brass Barstock Piston Manual Change Gas Control Panel

The Spec Master HPM6200 series single stage manual change control panels are designed for primary pressure gas control of non-corrosive or toxic, high purity gases up to grade 6.0 purity (99.9999%), on gas distribution systems where slight pressure variation is acceptable.

- **HPM6211 Series** | Single Stage Single Cylinder Piston Manual Gas Change Control Panel, FKM Seal
- **HPM6212 Series** | Single Stage Single Cylinder Piston Manual Gas Change Control Panel, EPDM Seal
- HPM6231 Series | Single Stage Twin Cylinder Piston Manual Gas Change Control Panel, FKM Seal
- **HPM6232 Series** | Single Stage Twin Cylinder Piston Manual Gas Change Control Panel, EPDM Seal

(\star)

FEATURES

High pressure isolation valves

High pressure purge facility

Single stage pressure regulation

Process line isolation valve

Encapsulated seat design

Single and twin cylinder configuration



MATERIALS

Bonnet Nickel Plated Brass Barstock Piston Brass
Piston Brass
Seal FKM / EPDM
Seat PCTFE
Filter 10 Micron 316L Stainless Steel

^{*} Subject to cylinder connection. **** Subject to final configuration.

SPECIFICATION

Maximum Inlet Pressure	60 bar (870 PSI) / 300 bar (4350 PSI)*
Delivery Pressure Range	20 bar (300 PSI) / 50 bar (725 PSI) / 100 bar (1450 PSI) / 200 bar (2900 PSI)
Gauge	50mm (2") Diameter
Ports	1/4" NPT Female
Temperature Range	-20° C to +60° C (-4° F to +140° F)
Flow Coefficient (Cv)	0.1
Helium Leak Integrity	1x10 ⁻⁹ mbar l/s
Weight	5.0kg (11.02 lbs)****




FLOW PERFORMANCE

300 bar inlet pressure @ 21° 0-200bar 0-200bar 0-200bar 0-200bar 0-200bar 0-200bar 0-200bar 0-200bar 0-500bar 0-200bar 0-500bar 0-500bar 0-500bar 0-500bar 0-500bar 0-500bar 0-500bar

FLOW (m3/H) Air


200 bar inlet pressure @ 21°








PROCESS & INSTRUMENTATION

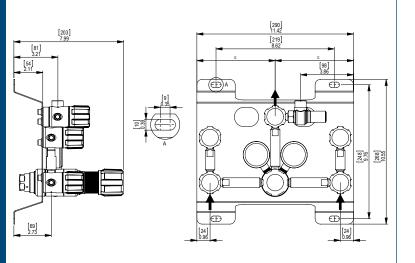



- Isolation Valve

- Isolation Valve (Closed)

- Adjustable Pressure Regulator with P1 Pressure Gauge and Pressure Relief Valve -- P2 Pressure Gauge
-- Pressure Relief Valve

- Denotes a Configurable Option

Model No. Selector Guide									
Product Type	Inlet Pressure	Outlet Pressure	Inlet Pressure Gauge	Outlet Pressure Gauge	Inlet/Cylinder Connection	Outlet Connection	Options		
HPM6211	02 60 bar / 870 PSI	07 -1 - 20 bar / 300 PSIG	00 No Gauge Fitted	00 No Gauge Fitted	000 No Inlet Fitted	00 No Outlet Fitted	A No Options Selected		
HPM6212	04 300 bar / 4350 PSI	10 -1 - 50 bar / 725 PSIG	01 bar/PSI	01 bar/PSI	001 1/8 Stainless Steel Compression	01 1/8 Stainless Steel Compression	F Bonnet Vent Capture Kit		
HPM6231		11 0-100 bar / 1450 PSI	02 bar/PSI Contact Gauge		002 1/4 Stainless Steel Compression	02 1/4 Stainless Steel Compression	G Helium Test Certificate		
HPM6232		12 0-200 bar / 2900 PSI			003 6mm Stainless Steel Compression	03 6mm Stainless Steel Compression	K Certificate of Conformity		
					004 1/4 NPT Male	04 1/4 NPT Male	M CO2 Burst Disc		
					007 G3/8 BSP R/H Brass Male	07 G3/8 BSP R/H Brass Male	P Calibration / Pressure Test Certificate		
					008 G3/8 BSP L/H Brass Male	08 G3/8 BSP L/H Brass Male	R Fitted Pipeline Pressure Relief Valve, FKM Seal		
							S Fitted Pipeline Pressure Relief Valve, EPDM Seal		
							X Special Instruction		